



ISO 9001:2008

Hooklift Containers MK

- F: Heavy version

Area of use:

Intended for the storage, segregation and transportation of wastes and recyclable materials, build garbages, muddy soil, and other materials according to customer wish.

Technical specification:


- the capacity of the container is 10 - 46 m³,
- frame according to SS, DIN and other standards,
- hook Lift loading system,
- thickness of steel sheets bottom: 5mm / side walls: 4mm,
- frame span: 750mm,
- double door with a door locking and security locking fitted on the side of the container.

Special Options:

- single door fitted with a security locking on the side of the container (also fitted with a rubber seal),
- top hinged rear door mounted on an extended section or at level with the base of the container,
- door built on the side of the container,
- ramp (in case the container is used for transportation of machines),
- roller cover,
- permanent roof,
- sliding roof slideable by hand,
- lifting roof lifted by a lifting break or a hydraulic pump.



▲ MK 46FLP (LP - Logo plate version with a logo on the side walls)

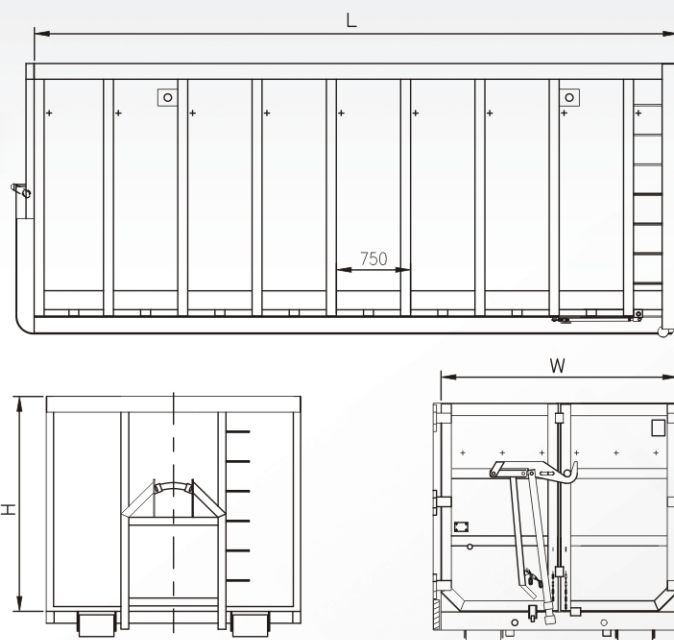

Type AMG	Capacity	Dimensions L W H [mm]	Steel thickness	Frame spam
MK 10F	10	6000x2380x750	4/5	750
MK 12F	12	6000x2380x850	4/5	750
MK 15F	15	6000x2380x1050	4/5	750
MK 20F	20	6000x2380x1400	4/5	750
MK 22F	22	6000x2380x1570	4/5	750
MK 25F	25	6000x2380x1750	4/5	750
MK 30F	30	6000x2380x2100	4/5	750
MK 35F	35	6000x2380x2400	4/5	750
MK 38F	38	6500x2380x2400	4/5	750
MK 41F	41	7000x2380x2400	4/5	750
MK 46F	46	7500x2380x2400	4/5	750