

Dumper HookLift Containers



ISO 9001:2008

Area of use:

Intended for collection and transportation of loose materials, build wastes (sand, gravel, breakstone) and other materials.

Technical specification:

- the capacity of the container is 14 m³,
- frame according to SS, DIN and other standards,
- hook lift loading system,
- thickness of steel sheets bottom: 5-6mm / side walls: 4mm.

Special Options:






- different capacity,
- various dimension,
- various thickness,
- top hinged rear door with pneumatic or hydraulic cylinder,
- combination of materials, S235, S355, Hardox, Domex,
- special paint,
- other options for request.



▲ MK 14DH4H6



▲ MK 14DL46HD-90

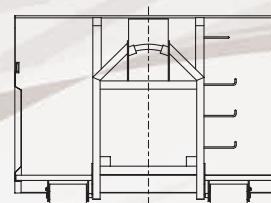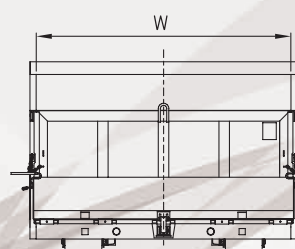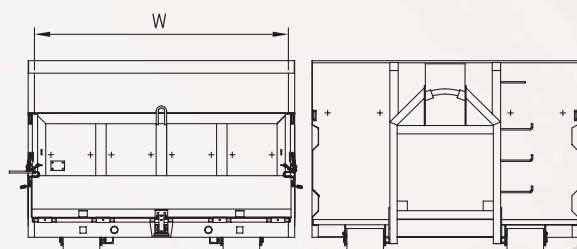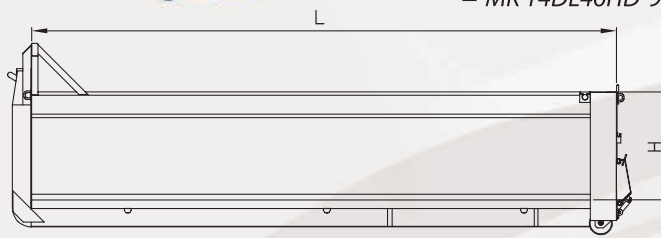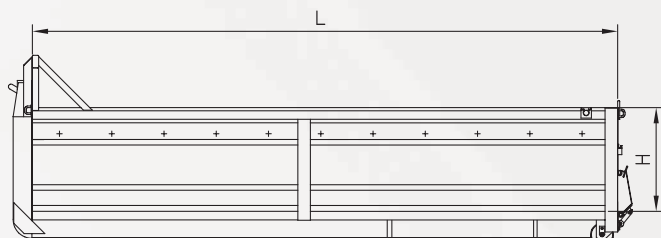

Type AMG	Capacity	Dimensions L W H [mm]	Steel thickness	Frames
MK 14DH4H6	14	6000x2420x1000	4/6	Hardox
MK 14DD4H6	14	6000x2420x1000	4/6	Hardox/Domex
MK 14DL46HD-90	14	6000x2420x1000	4/6	Hardox/Domex
MK 14DL45-90	14	6000x2420x1000	4/5	S235

Przedsiębiorstwo Produkcyjno Handlowe AMG Sp. z o.o.
 ul. Słupska 18; 84-300 Łęborg; Poland
 Tel. +48 59 862 32 77, Tel. +48 59 862 87 80, Fax. +48 59 862 23 15
 e-mail: office@amg.pl; web: www.amg.pl